


SERVER TECHNOLOGY, INC.
 PROPRIETARY INFORMATION
 THIS DOCUMENT IS THE SOLE PROPERTY OF SERVER
 TECHNOLOGY, INC. THE REPRODUCTION
 OR TRANSMISSION OF THIS DOCUMENT AND
 THE RELEASE OF DATA CONTAINED IN THIS DOCUMENT AND
 OF THIS DOCUMENT, IN WHOLE OR IN PART, WITHOUT THE
 WRITTEN PERMISSION
 OF SERVER TECHNOLOGY, INC.
 IS PROHIBITED.
 THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPO
 RTED FROM THE
 UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINIS
 TRATION
 REGULATIONS. DIVERSION CONTRARY TO U.S. LAW IS PRO
 HIBITED.

RoHS COMPLIANT

REVISION HISTORY

ZONE	REV	DATE	APPROVED
-	1	7/23/2015	

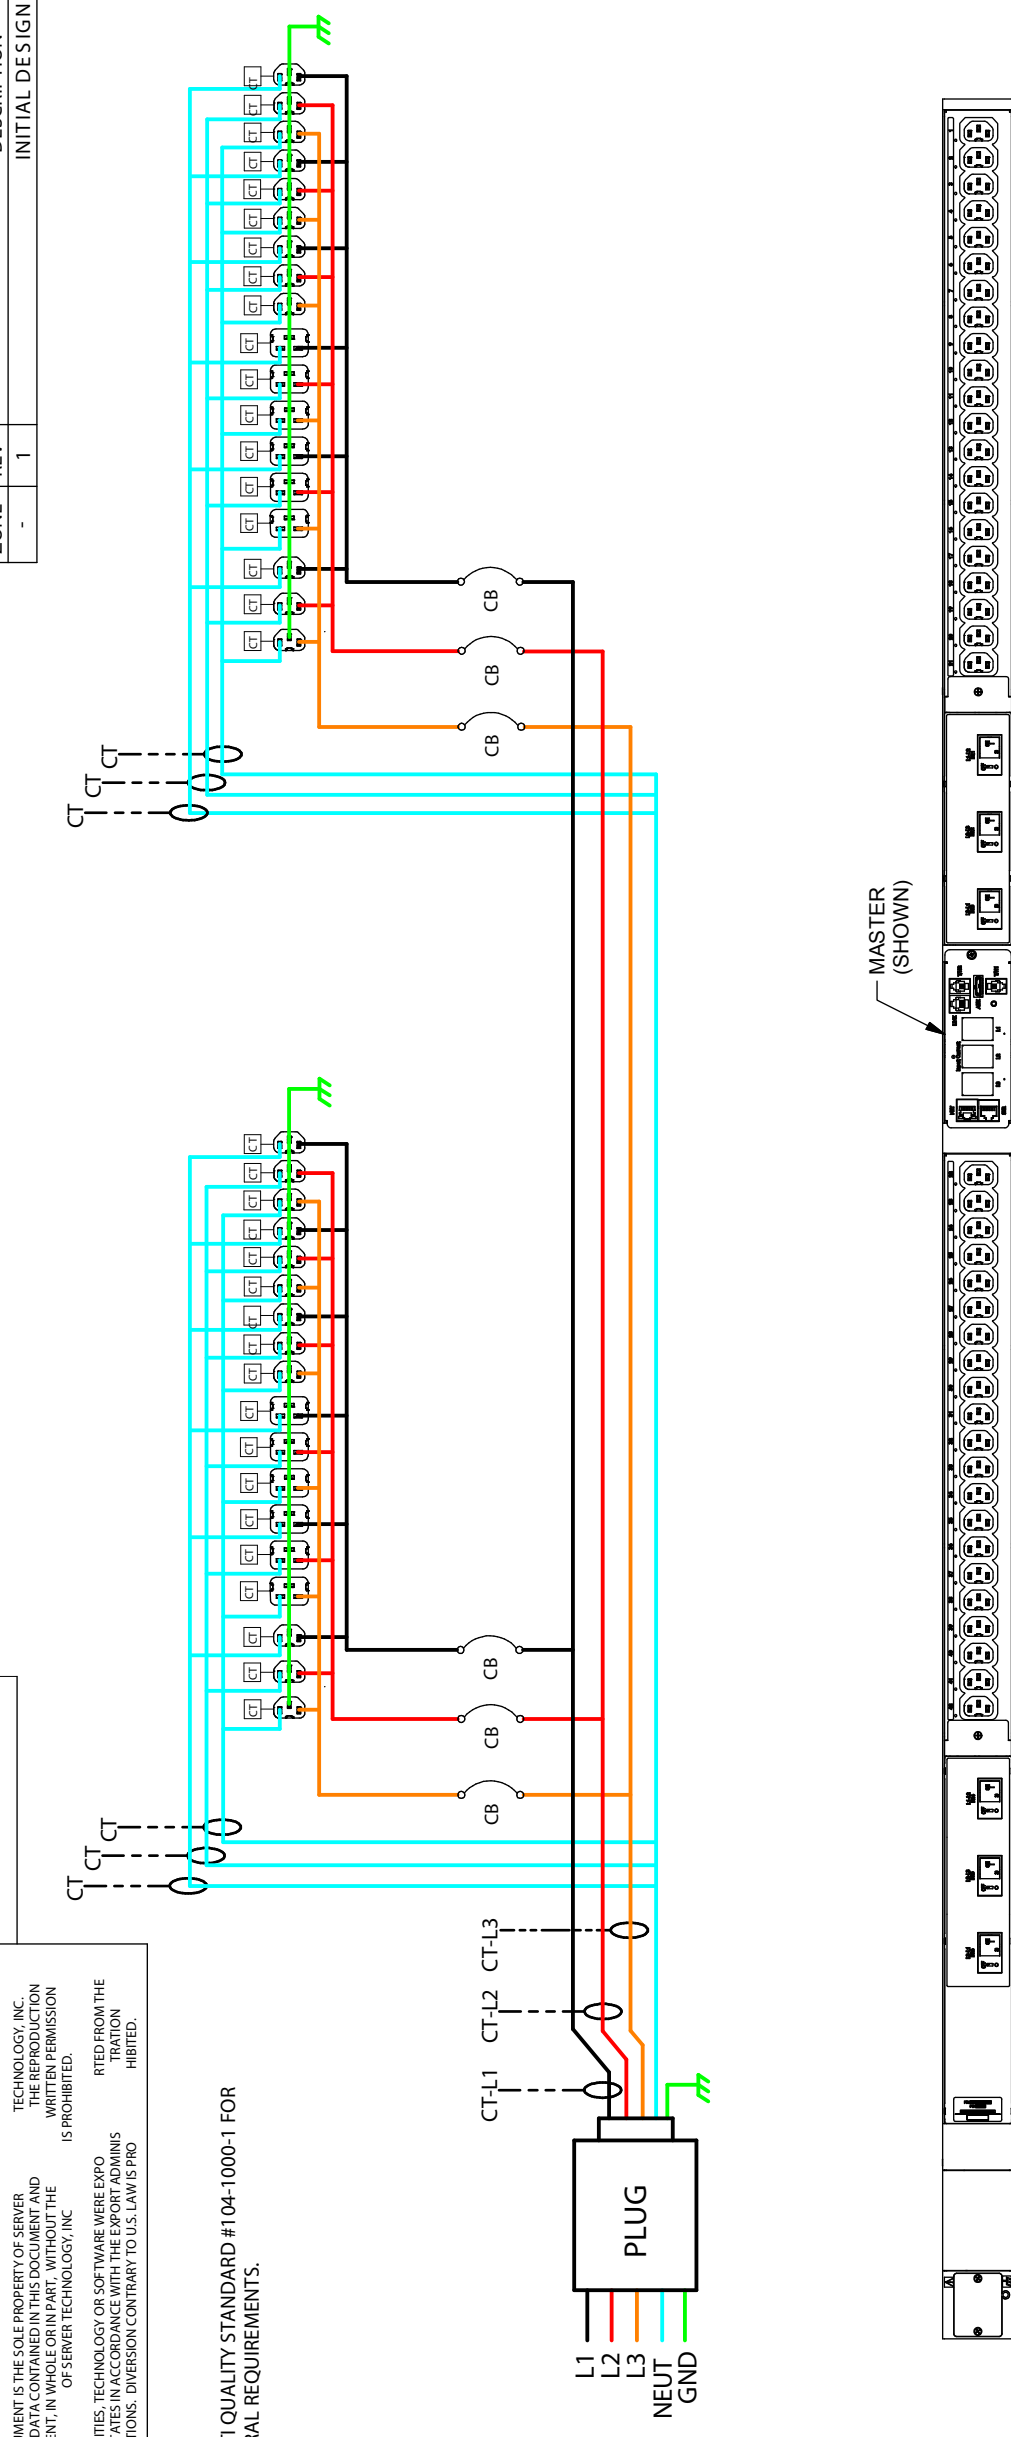

NOTES:

- SEE STI QUALITY STANDARD #104-1000-1 FOR GENERAL REQUIREMENTS.

Part Number	Certification	Input	Output
Master	Expansion	Input Type	Outlet Type and Ratings
C2WxxCE-4NAE29yy	Rating Standard	Rating	Total Output Rating
C2WxxCE-4PAE29yy	TUVGS	230/400V 3P+N+PE, 50/60Hz; 16A	230V, 50/60Hz; <= 48A
C2WxxCE-5BAE29yy	TUVGS	230/400V 3P+N+PE, 50/60Hz; 32A	IEC 60320: C19 <= 16A each, C13 <= 10A each
C2WxxCE-5CAE29yy	cTUVus and/or cULus	240/415V 3P+N+PE, 50/60Hz; 16A	230V, 50/60Hz; <= 96A
C2WxxCE-5NAE29yy	cTUVus and/or cULus	240/415V 3P+N+PE, 50/60Hz; 24A	IEC 60320: C19 <= 16A each, C13 <= 10A each
C2WxxCE-5PAE29yy	cTUVus and/or cULus	240/415V 3P+N+PE, 50/60Hz; 16A	IEC 60320: C19 <= 16A each, C13 <= 12A each
	cTUVus and/or cULus	240/415V 3P+N+PE, 50/60Hz; 24A	IEC 60320: C19 <= 16A each, C13 <= 12A each
			IEC 60320: C19 <= 16A each, C13 <= 12A each
			IEC 60320: C19 <= 16A each, C13 <= 12A each

Note: "xx" designates total number of outlets and "yy" designates code for number of the two outlet modules

ISO VIEW



SERVER TECHNOLOGY INC.
 1040 Sandhill Drive Reno, NV 89521

DRAWING TITLE:

<p>UNLESS OTHERWISE SPECIFIED</p> <ul style="list-style-type: none"> INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.100-2000 DIMENSIONING & TOLERANCING IN ACCORDANCE WITH ASME Y14.5M-2007 REMOVE ALL BURRS AND SHARP EDGES .2 R MAX DIMENSIONS ARE IN MILLIMETERS DIMENSIONAL LIMITS APPLY AFTER PLATING/COATING. <p>DO NOT SCALE DRAWING</p> <p>THIRD ANGLE PROJECTION</p>	<p>UNLESS OTHERWISE SPECIFIED</p> <ul style="list-style-type: none"> DIMENSIONING & TOLERANCING IN ACCORDANCE WITH ASME Y14.5M-2007 REMOVE ALL BURRS AND SHARP EDGES .2 R MAX DIMENSIONS ARE IN MILLIMETERS DIMENSIONAL LIMITS APPLY AFTER PLATING/COATING. <p>DO NOT SCALE DRAWING</p> <p>THIRD ANGLE PROJECTION</p>
<p>TOLERANCES (UNLESS OTHERWISE SPECIFIED)</p> <p>LINEAR DIMENSIONS:</p> <ul style="list-style-type: none"> .X = ± .500 .XX = ± .300 .XXX = ± .150 <p>ANGULAR DIMENSIONS:</p> <ul style="list-style-type: none"> X = ± 1° XX = ± 5' XXX = ± 25' 	<p>SYMBOLS</p> <ul style="list-style-type: none"> (O#) = CRITICAL DIM. (S) = COSMETIC SURFACE
<p>MATERIAL:</p> <p>FINISH:</p>	<p>SCALE: NONE</p> <p>DWG NO. 495-0983-43</p> <p>SIZE B</p> <p>CAGE CODE 049V0</p> <p>REV 1</p>